


R-H 2242-TD POCKET BAG TAPING MACHINE



PERFORMANCE

4000 - 4400 bags / 8 Hours
500 - 550 bags / 1 Hour

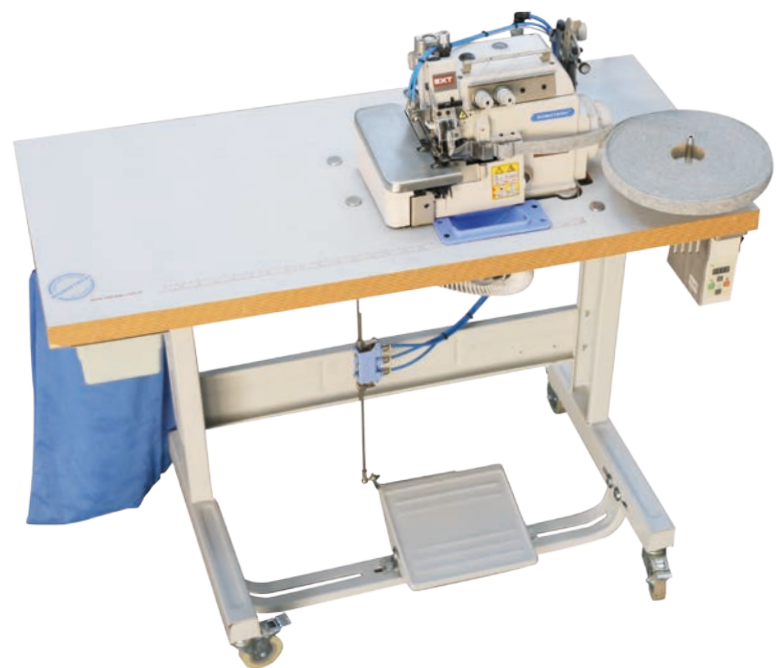

R-H 2242-TD is an automated machine designed to provide the best feeding at high speeds without skip stitches on the closing of the trouser bag edges with auto feed tape. The fabric transport system is designed to perform ideal feeding by placing the top transport gear behind the presser foot. The adjustable elliptical feeding of the top transport gear allows same length of feeding for the tape and the pocket bag edge, preventing the skip stitches especially in higher speed manual operations caused due to the round shape of the pocket bag. The auto tape cutting system allows for cutting of the tape at stitch start and stitch end.

TECHNICAL SPECIFICATIONS

- Stitch length adjustment : Push-button
- Differential feed ratio adjustment : Lever with micro-adjustment
- Lubrication : Fully-automatic

ADVANTAGES

- No skip stitches on the curve shape
- Perfect quality on the trouser pocket bag
- Very high stich speed
- Adjustable top rear transport
- Adjustable tape feeding according to type of the tape fabric and stitching speed

TECHNICAL DETAILS

Max. machine speed (sti/min) : 7000
 No. of needles: 2 , No. of threads: 5
 Needle space: 3,5 mm
 Overedge width: 4, 5, 6 mm
 Top feed dog Front-to-back movement : 1-6 mm
 Top feed dog Up-to-down movement : 3.5 mm

DIMENSIONS

L: 85 cm / W: 105 cm / H: 120 cm
 Packing Size : 127 cm x 89 cm x 145 cm
 Machine Net Weight : approx. 110 kg
 Machine Gross Weight : approx. 135 kg

